









HPC-4



HPC-6



HPC-9



HPC-12



HPC-18



HPC24



HPC36



HPC-54





HT–3



HT–5



HT–8



HT–12



HT–15



HT–18



HT–24





HA-4



HA-8



HA-12



HA-18



HA-24





-2B



-2B



-4B



-5B



-6B



-8B



-10B



-12B



-13B



-16B



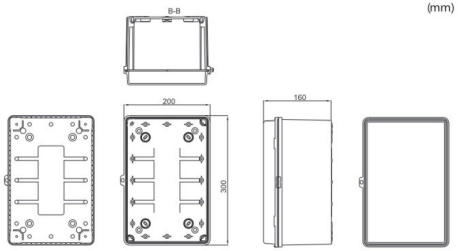
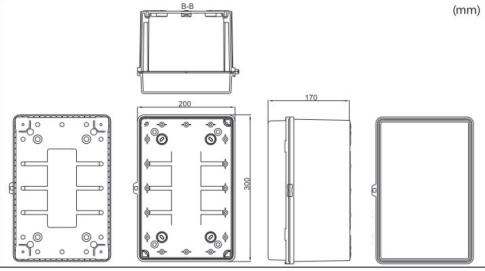
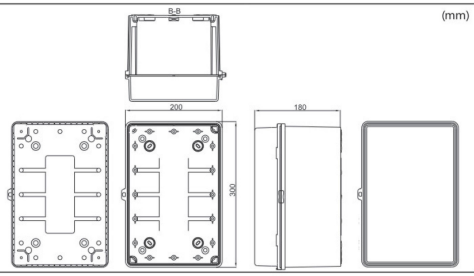
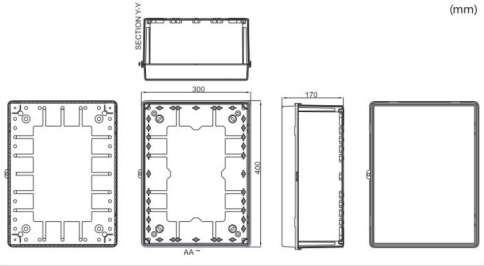
-18B

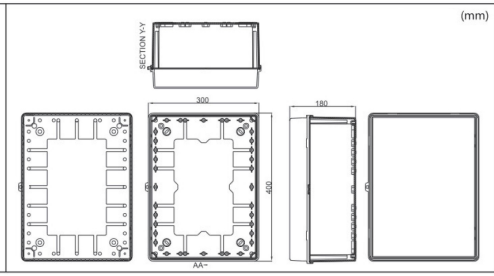
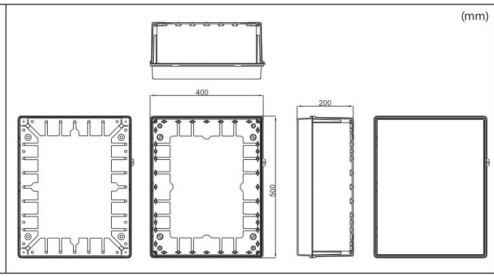
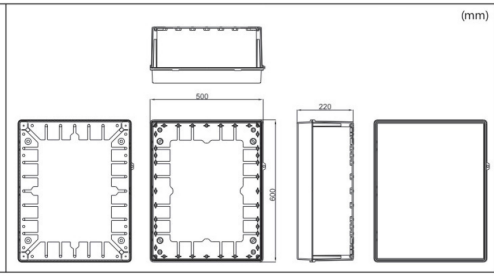


A G F - 20 30 160

- (H)
- (L)
- (W)
- F:
  P:
  H:
- G: T:
- A: ABS P: PC

	PC	ABS
防护等级（EN 60529）	IP65	IP65
抗冲击性能（EN 62262）	IK08	IK08
温度范围（短期）	- 40℃ ~ 120℃	- 40℃ ~ 80℃
温度范围（连续）	- 40℃ ~ 80℃	- 40℃ ~ 60℃
绝缘性	完全绝缘	完全绝缘
色泽（不透明—浅灰色部分）	RAL 7035	RAL 7035
（透明—PC盖部分）	透明/烟灰色	透明/烟灰色
铰链/搭扣色泽（PC）	RAL 7035	RAL 7035
密封垫	PUR/EPDM	PUR/EPDM
阻燃等级	UL 94-5V	UL 94HB
燃烧导线测试（IEC 695-2-1）	960℃	650℃
无毒性	无卤素	无卤素
抗紫外线测试（UV）	UL 508 在老化机中720小时	
抗化学腐蚀性能	良好	良好

AG-3020160 AT-3020160 PG-3020160 PT-3020160		00103020160063 00103020160081 00103020160073 00103020160091
AG-3020170 AT-3020170 PG-3020170 PT-3020170		00203020170069 00203020170088 00203020170075 00203020170094
AG-3020180 AT-3020180 PG-3020180 PT-3020180		00303020180075 00303020180094 00303020180081 00303020180097
AG-3040170 AT-3040170 PG-3040170 PT-3040170		00403040170081 00403040170116 00403040170115 00403040170150

AG-3040180 AT-3040180 PG-3040180 PT-3040180		005030400180081 005030400180125 005030400180122 005030400180156
AG-4050200 AT-4050200 PG-4050200 PT-4050200		00604050222140 00604050200167 00604050200209 00604050200249
AG-5060220 AT-5060220 PG-5060220 PT-5060220		007050600205 007050600222 007050600235 007050600280



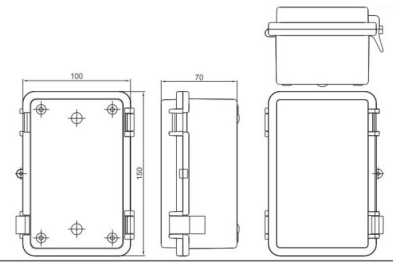
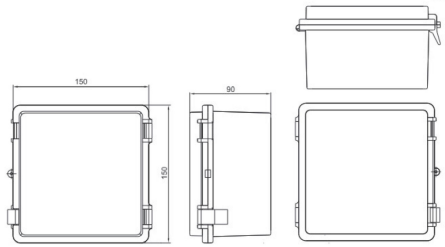

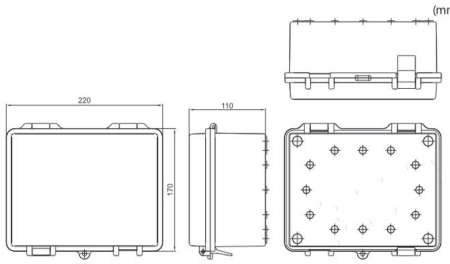


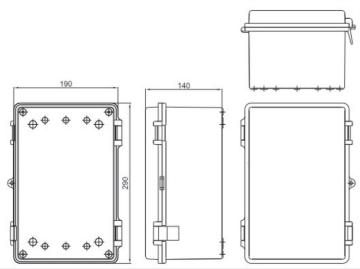
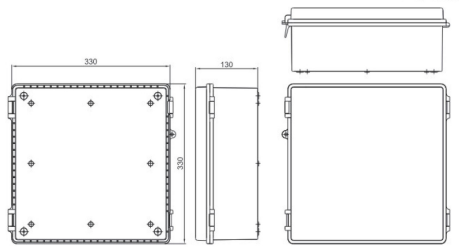
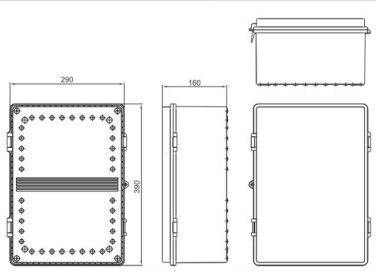


A G P - 20 30 160

- (H)
- (L)
- (W)
- P:
  - F:
  - H:
- G: T:
- A: ABS P: PC

	PC	ABS
防护等级（EN 60529）	IP65	IP65
抗冲击性能（EN 62262）	IK08	IK08
温度范围（短期）	- 40℃ ~ 120℃	- 40℃ ~ 80℃
温度范围（连续）	- 40℃ ~ 80℃	- 40℃ ~ 60℃
绝缘性	完全绝缘	完全绝缘
色泽（不透明—浅灰色部分）	RAL 7035	RAL 7035
（透明—PC盖部分）	透明/烟灰色	透明/烟灰色
铰链/搭扣色泽（PC）	RAL 7035	RAL 7035
密封垫	PUR/EPDM	PUR/EPDM
阻燃等级	UL 94-5V	UL 94HB
燃烧导线测试（IEC 695-2-1）	960℃	650℃
无毒性	无卤素	无卤素
抗紫外线测试（UV）	UL 508 在老化机中720小时	
抗化学腐蚀性能	良好	良好

AG-151070 AT-151070 PG-151070 PT-151070	(mm) 	04201510700001 04201510700002 04201510700003 04201510700004
AG-151590 AT-151590 PG-151590 PT-151590	(mm) 	04211515900005 04211515900006 04211515900007 04211515900008
AG-201070 AT-201070 PG-201070 PT-201070	(mm) 	04222010700009 04222010700010 04222010700011 04222010700012
AG-2217110 AT-2217110 PG-2217110 PT-2217110	(mm) 	042322171100013 042322171100014 042322171100015 042322171100016

AG-2919140 AT-2919140 PG-2919140 PT-2919140	(mm) 	042429191400017 042429191400018 042429191400019 042429191400020
AG-3333130 AT-3333130 PG-3333130 PT-3333130	(mm) 	042533331300021 042533331300022 042533331300023 042533331300024
AG-3929160 AT-3929160 PG-3929160 PT-3929160	(mm) 	042639291600025 042639291600026 042639291600027 042639291600028







A G S - 19 28 130

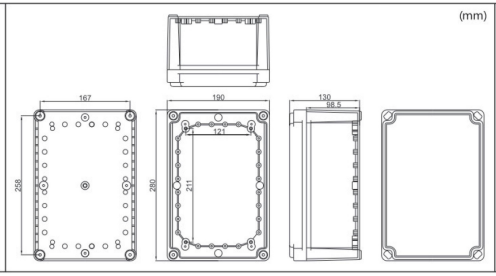
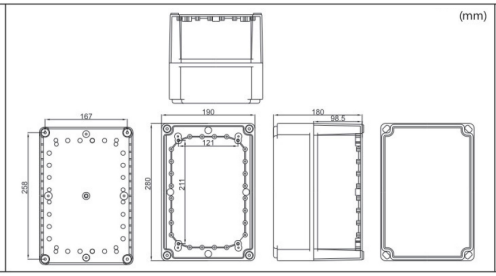
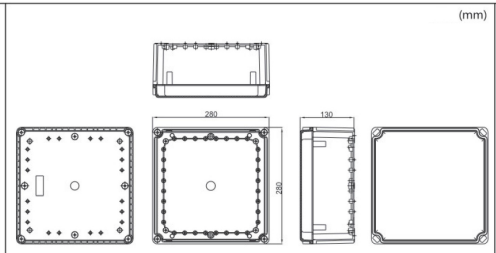
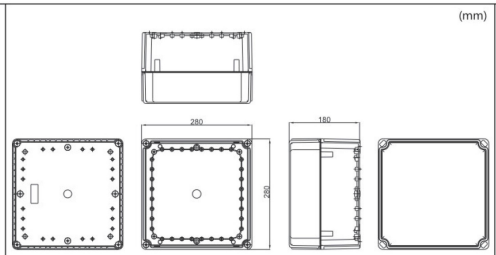
- (H)
- (L)
- (W)
- S:
- B:
- H:
- G:T:
- A: ABS P: PC

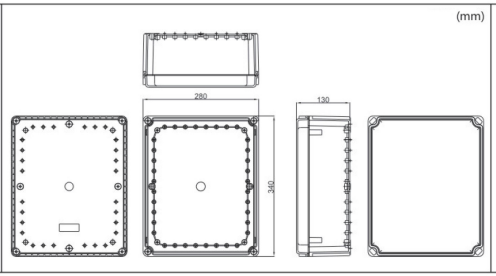
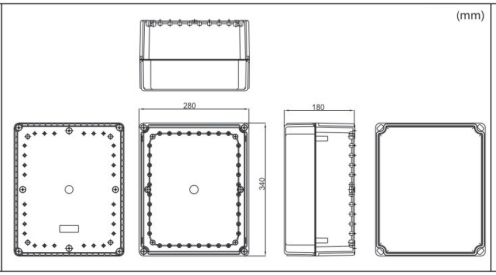
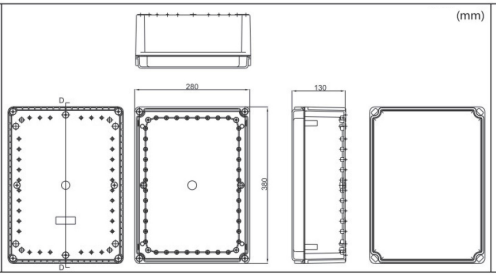
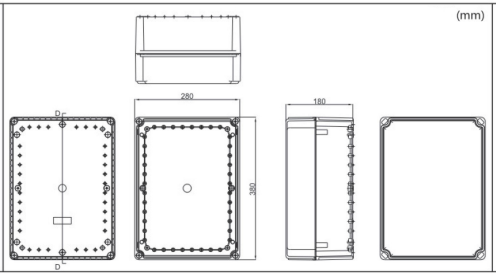
	PC	ABS
防护等级（EN 60529）	IP66/IP67 IP65（FSH）	IP66/IP67 IP65（FSH）
抗冲击性能（EN 62262）	IK08（侧面） IK09（前面）	IK08
温度范围（短期）	- 40℃ ~ 120℃	- 40℃ ~ 80℃
温度范围（连续）	- 40℃ ~ 80℃	- 40℃ ~ 60℃
绝缘性	完全绝缘	完全绝缘
色泽（不透明—浅灰色部分）	RAL 7035	RAL 7035
（透明—PC盖部分）	无色	无色
盖螺钉色泽	RAL 7035	RAL 7035
盖螺钉材质	PA	PA
密封垫	PUR	PUR
阻燃等级	UL 94-5V	UL 94HB
燃烧导线测试	960℃	650℃
无毒性	无卤素	无卤素
抗紫外线测试（UV）	UL 508 在老化机中720小时	
抗化学腐蚀性能	良好	良好

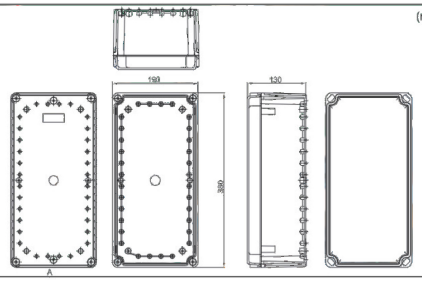
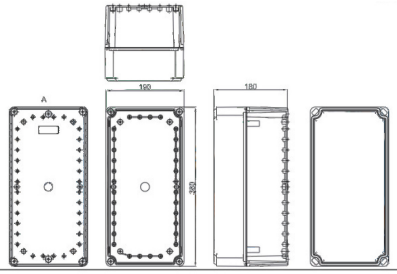
* 数据更改，恕不通知。

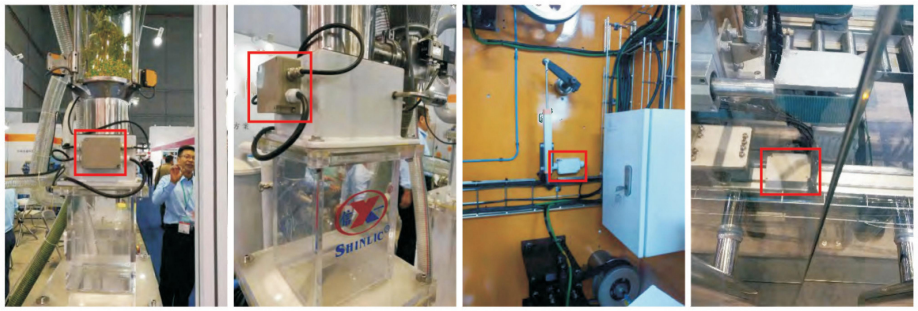




AG-2819130 AT-2819130 PG-2819130 PT-2819130		032028191300041 032028191300051 032028191300060 032028191300072
AG-2819180 PG-2819180		033028191800050 033028191800065
AG-2828130 AT-2828130 PG-2828130 PT-2828130		034028281300048 034028281300058 034028281300061 034028281300073
AG-2828180 PG-2828180		035028281800059 035028281800075

AG-2834130 AT-2834130 PG-2834130 PT-2834130		036028341300059 036028341300069 036028341300076 036028341300092
AG-2834180 PG-2834180		037028341800072 037028341800093
AG-2838130 AT-2838130 PG-2838130 PT-2838130		038028381300071 038028381300112 038028381300090 038028381300108
AG-2838180 PG-2838180		039028381800084 039028381800099

AG-3819130 AT-3819130 PG-3819130 PT-3819130	(mm) 	040038191300057 040038191300089 040038191300087 040038191300105
AG-3819180 PG-3819180	(mm) 	041038191800069 041038191800096





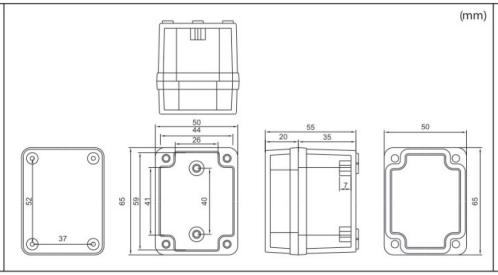
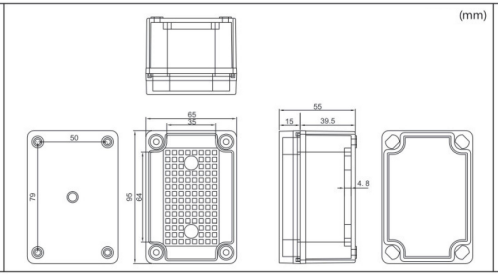
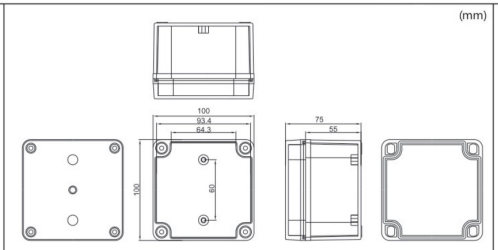
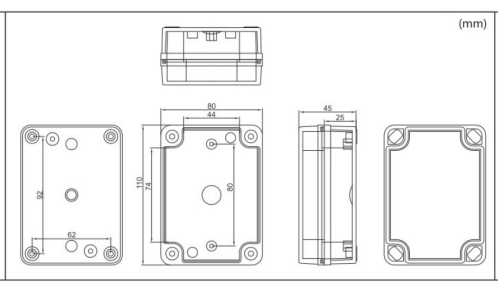
A G S - 15 20 100

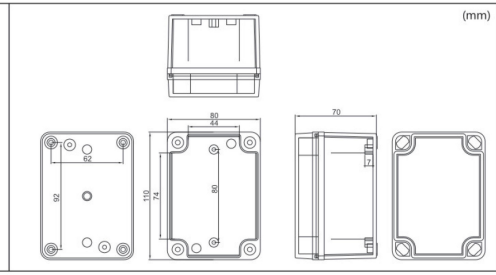
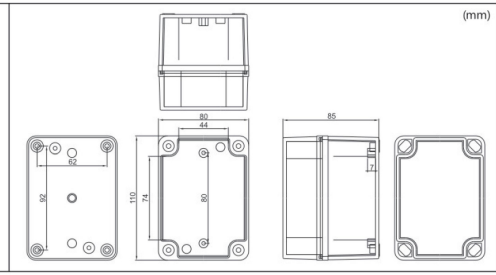
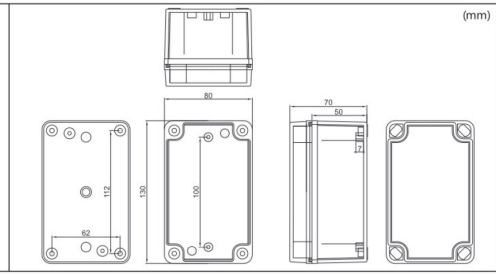
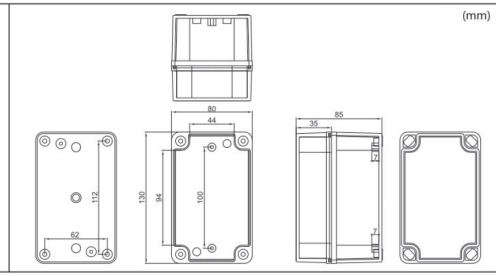
- (H)
- (L)
- (W)
- S / B / H
- G:T:
- A: ABS P: PC

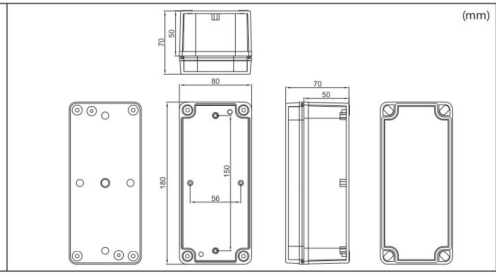
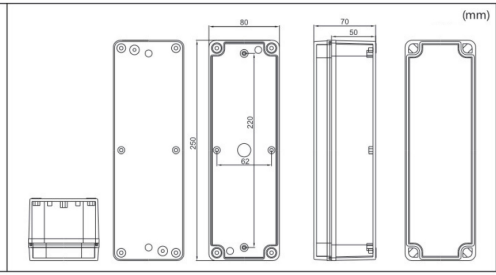
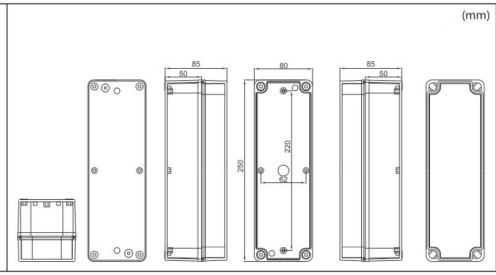
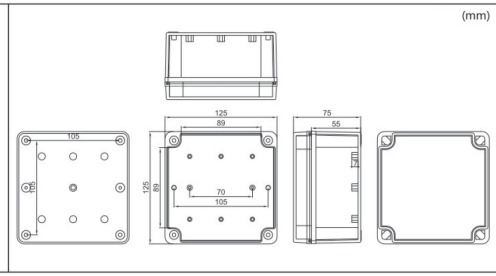
	PC	ABS
防护等级	IP66/IP67	IP66/IP67
抗冲击性能	IK08	IK07
温度范围（短期）	- 40℃ ~ 120℃	- 40℃ ~ 80℃
温度范围（连续）	- 40℃ ~ 80℃	- 40℃ ~ 60℃
绝缘性	完全绝缘	完全绝缘
色泽（不透明—浅灰色部分）	RAL 7035	RAL 7035
（透明—PC盖部分）	烟灰色	烟灰色
盖螺钉色泽	RAL 7035	RAL 7035
盖螺钉材质	PA	PA
密封垫	PUR	PUR
阻燃等级	UL 94-5V	UL 94HB
燃烧导线测试	960℃	650℃
无毒性	无卤素	无卤素
抗紫外线测试（UV）	UL 508 在老化机中720小时	
抗化学腐蚀性能	良好	良好

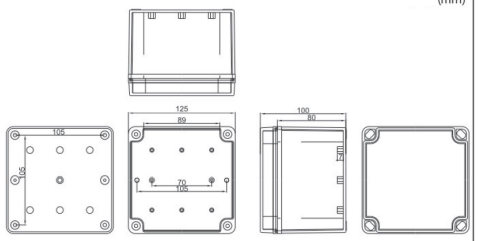


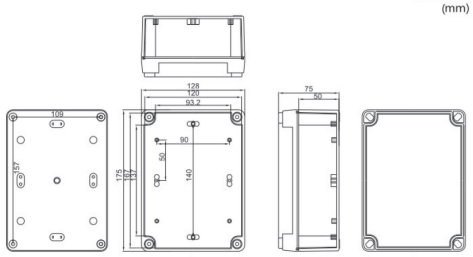


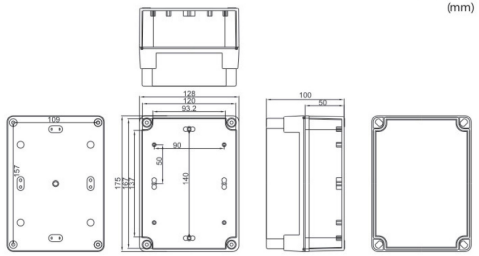
AG-050655 AT-050655 PG-050655 PT-050655		00800506550006 00800506550009 00800506550010 00800506550011
AG-060955 AT-060955 PG-060955 PT-060955		00900609550007 00900609550009 00900609550010 00900609550012
AG-101075 AT-101075 PG-101075 PT-101075		01001010750011 01001010750015 01001010750014 01001010750017
AG-081145 AT-081145 PG-081145 PT-081145		01100811450008 01100811450011 01100811450010 01100811450012

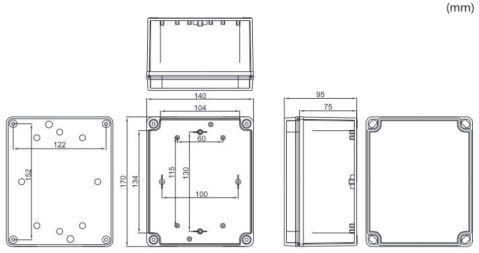
AG-081170		01200811700009
AT-081170		01200811700013
PG-081170		01200811700012
PT-081170		01200811700014
AG-081185		01300811850010
AT-081185		01300811850013
PG-081185		01300811850014
PT-081185		01300811850016
AG-081370		01400813700010
AT-081370		01400813700014
PG-081370		01400813700013
PT-081370		01400813700015
AG-081385		01500813850011
AT-081385		01500813850014
PG-081385		01500813850016
PT-081385		01500813850018

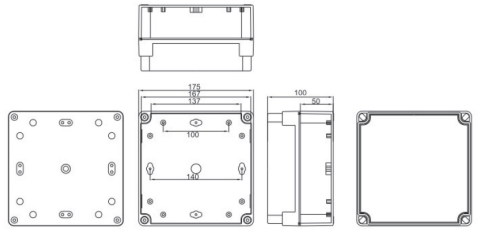
AG-081870		01600818700012
AT-081870		01600818700017
PG-081870		01600818700016
PT-081870		01600818700019
AG-082570		01700825700014
AT-082570		01700825700019
PG-082570		01700825700017
PT-082570		01700825700020
AG-082585		01800825850015
AT-082585		01800825850020
PG-082585		01800825850021
PT-082585		01800825850024
AG-121275		01901212750012
AT-121275		01901212750017
PG-121275		01901212750018
PT-121275		01901212750020

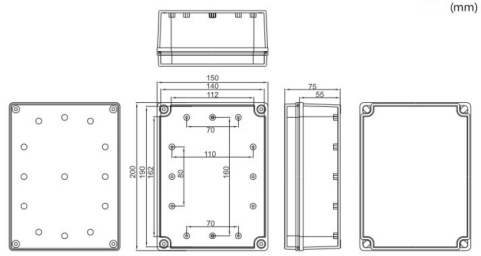
AG-1212100	(mm) 	020012121000015
AT-1212100		020012121000020
PG-1212100		020012121000021
PT-1212100		020012121000025

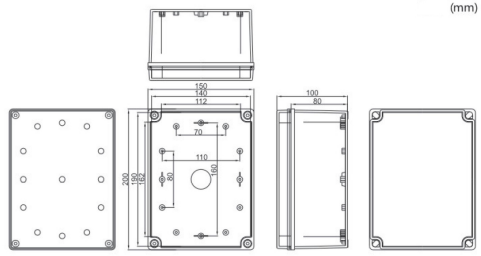
AG-121775	(mm) 	02101217750016
AT-121775		02101217750023
PG-121775		02101217750024
PT-121775		02101217750027

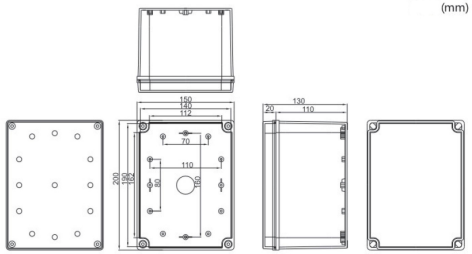
AG-1217100	(mm) 	022012171000018
AT-1217100		022012171000025
PG-1217100		022012171000024
PT-1217100		022012171000029

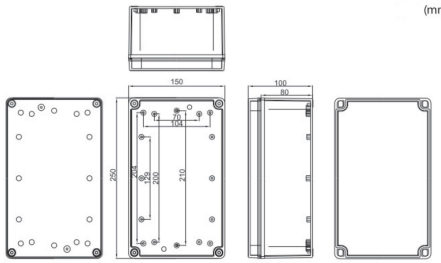
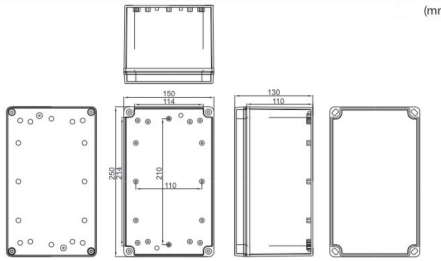
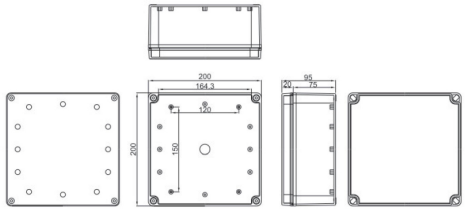
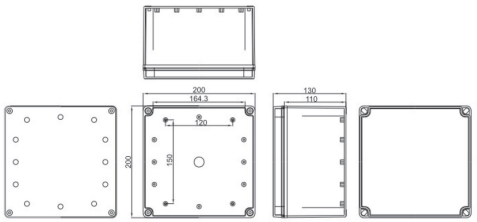
AG-141795	(mm) 	02301417950019
AT-141795		02301417950026
PG-141795		02301417950024
PT-141795		02301417950029

AG-1717100	(mm) 	024017171000021
AT-1717100		024017171000030
PG-1717100		024017171000027
PT-1717100		024017171000032

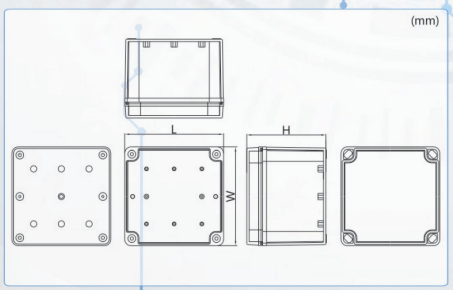
AG-152075	(mm) 	02501520750019
AT-152075		02501520750026
PG-152075		02501520750025
PT-152075		02501520750029

AG-1520100	(mm) 	026015201000020
AT-1520100		026015201000027
PG-1520100		026015201000026
PT-1520100		026015201000029

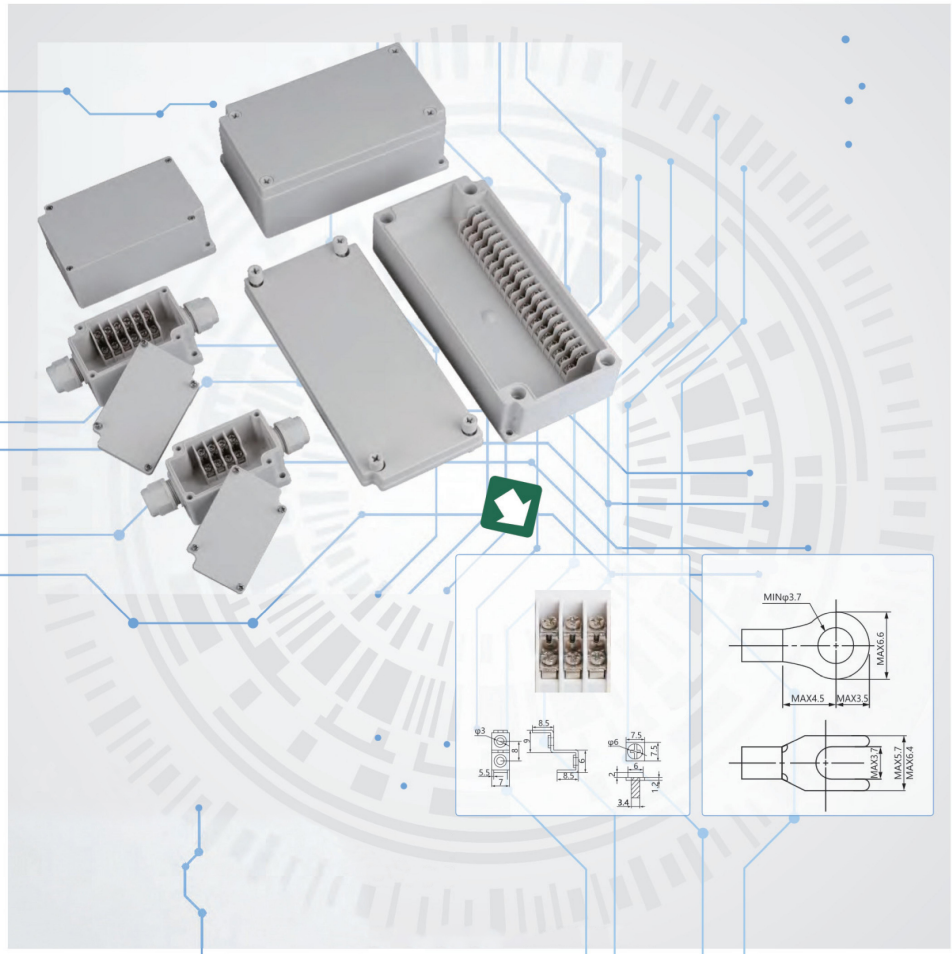
AG-1520130	(mm) 	027015201300024
AT-1520130		027015201300034
PG-1520130		027015201300031
PT-1520130		027015201300035

AG-1525100 AT-1525100 PG-1525100 PT-1525100		028015251000023 028015251000026 028015251000029 028015251000033
AG-1525130 AT-1525130 PG-1525130 PT-1525130		029015251300026 029015251300034 029015251300031 029015251300037
AG-202095 AT-202095 PG-202095 PT-202095		03002020950025 03002020950035 03002020950026 03002020950031
AG-2020130 AT-2020130 PG-2020130 PT-2020130		031020201300026 031020201300038 031020201300028 031020201300033



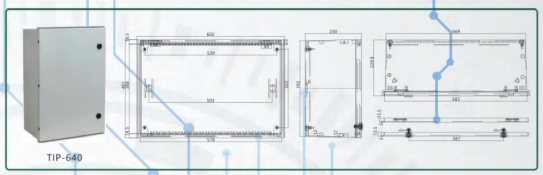


	L*W*H(mm)
A-1006050G A-1006050T	100*68*50
A-2012075G A-2012075T	200*120*75
A-1611090G A-1611090T	160*110*90
A-1109055G A-1109055T	115*90*55
A-1010070G A-1010070T	100*100*70
A-1212090G A-1212090T	120*120*90
A-1509060G A-1509060T	158*90*60
A-1616090G A-1616090T	160*160*90
A-2020095G A-2020095T	200*200*95
A-2315080G A-2315080T	230*150*87
A-3224110G A-3224110T	320*240*110

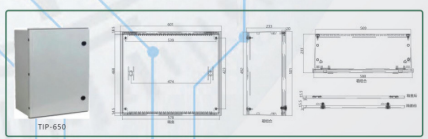


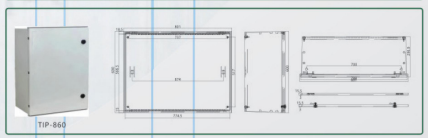
		(mm)				
4P	4	50.5	128.5	44		φ10mm
6P	6	55.5	137.5	44		φ10mm
10P	10	75.5	125.5	44		-
15P	15	100.5	179.5	56		-
20P	20	100.5	222.5	56		-

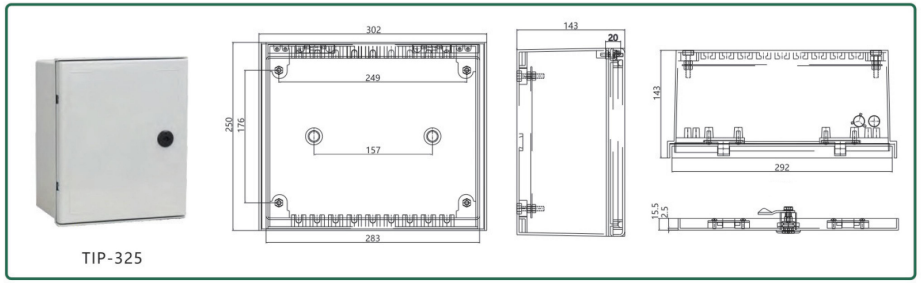
	PC	ABS
防护等级（EN 60529）	IP66/IP67 IP65（FSH）	IP66/IP67 IP65（FSH）
抗冲击性能（EN 62262）	IK08（侧面） IK09（前面）	IK08
温度范围（短期）	- 40℃～120℃	- 40℃～80℃
温度范围（连续）	- 40℃～80℃	- 40℃～60℃
绝缘性	完全绝缘	完全绝缘
色泽（不透明—浅灰色部分）	RAL 7035	RAL 7035
（透明—PC盖部分）	无色	无色
盖螺钉色泽	RAL 7035	RAL 7035
盖螺钉材质	PA	PA
密封垫	PUR	PUR
阻燃等级	UL 94-5V	UL 94HB
燃烧导线测试	960℃	650℃
无毒性	无卤素	无卤素
抗紫外线测试（UV）	UL 508 在老化机中720小时	
抗化学腐蚀性能	良好	良好

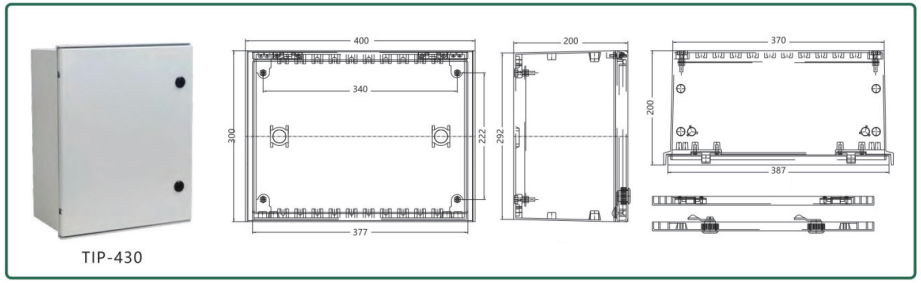

TIP-640

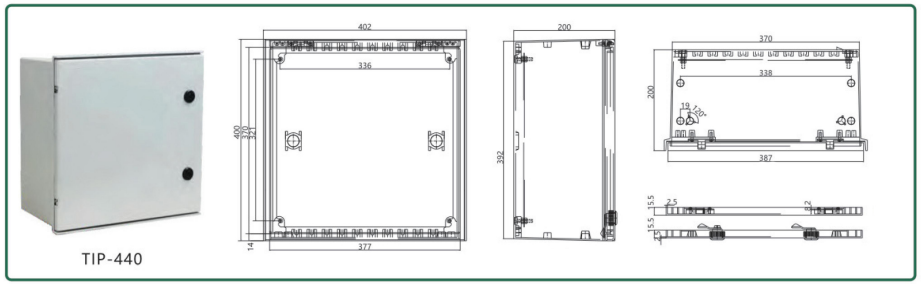


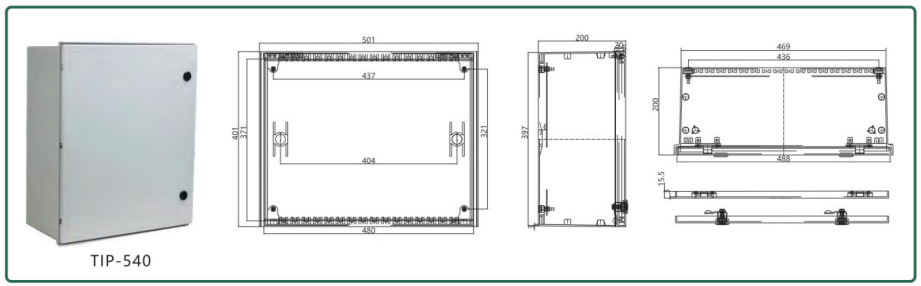

TIP-650


TIP-860


TIP-325
302
249
157
250
176
283
143
20
143
292
15.5
2.5


TIP-430
400
340
300
222
377
200
292
370
200
387


TIP-440
402
336
400
321
14
377
200
392
370
338
200
19
387
155
2.5
2
155


TIP-540
501
437
401
321
404
480
200
397
469
436
200
488
155

New type of socket distribution boxes and enclosures

It is applicable for special waterproof, dustproof and corrosion–proof locations

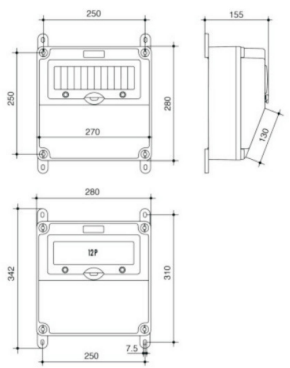
Executive standard
IEC60529 EN 60309 IP67



Order Code
ZJ282815



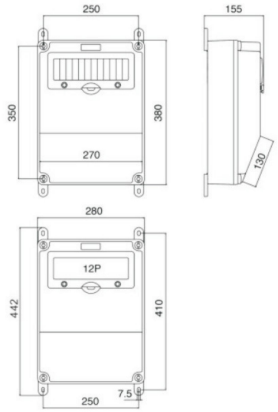
Outline dimension drawing



Order Code
ZJ283815



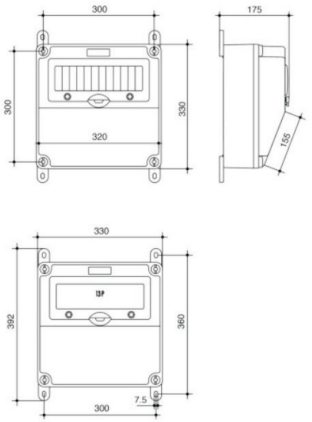
Outline dimension drawing



Order Code
ZJ333317



Outline dimension drawing



New type of socket distribution boxes and enclosures

It is applicable for special waterproof, dustproof and corrosion–proof locations

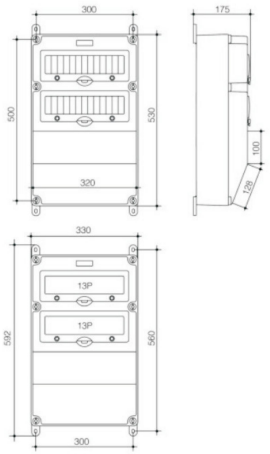
Executive standard
IEC60529 EN 60309 IP67



Order Code
ZJ335317



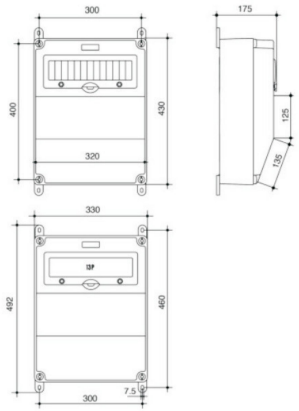
Outline dimension drawing



Order Code
ZJ334317



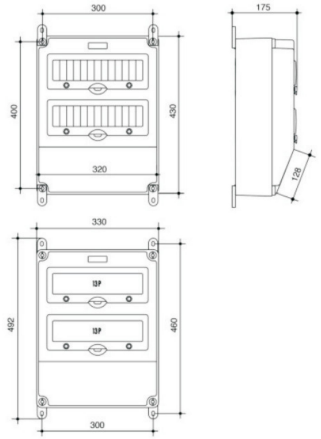
Outline dimension drawing



Order Code
ZJ334317–2



Outline dimension drawing





300x200x170



300x200x170



400x300x170



400x300x170



500x400x200



500x400x200



600x500x220



600x500x220

Full-plastic sealing box

Waterproof, dustproof, anticorrosion, high-strength insulation
Any opening is available according to the customers' demands,
it is very complete in specification and convenient in installation.

Executive standard
IEC60529 EN60309 IP66



Model of product	Outline dimension(mm)			Order code
	A	B	C	
ZJ7-ABS-A	200	300	170	3020170
	300	400	170	4030170
	400	500	200	5040200
	500	600	220	6050220
ZJ7-ABS-B	200	300	170	3020171
	300	400	170	4030171
	400	500	200	5040201
	500	600	220	6050221
ZJ7-PC-A	200	300	170	3020172
	300	400	170	4030172
	400	500	200	5040202
	500	600	220	6050222
ZJ7-PC-B	200	300	170	3020173
	300	400	170	4030173
	400	500	200	5040203
	500	600	220	6050223
ZJ7-ABS-A-M	200	300	170	3020174
	300	400	170	4030174
	400	500	200	5040204
	500	600	220	6050224
ZJ7-PC-A-M	200	300	170	3020175
	300	400	170	4030175
	400	500	200	5040205
	500	600	220	6050225

Model explaination



Order Code
ZJ12PCZX-1



Power Input	Output circuit	Switch protection
1 ZJ 16A 5P	1 ZJ 16A 5P	1 RCD 32A 4P 0.03A
3M 5x2.5mm^2 Cable	6 SCHUKO 16A 230V	1 MCB 16A 3P
		3 MCB 16A 1P

Order Code
ZJ12PCZX-2



Power Input	Output circuit	Switch protection
1 ZJ 32A 5P	1 ZJ 16A 5P	1RCD 40A 4P 0.03A
3M 5x4mm^2 Cable	1 ZJ 32A 5P	1 MCB 32A 3P
	6 SCHUKO 16A 230V	1 MCB 16A 1P

Order Code
ZJ12PCZX-3



Power Input	Output circuit	Switch protection
1 ZJ 32A 5P	2 ZJ 16A 5P	1RCD 63A 4P 0.03A
3M 3x4mm^2 Cable	2 ZJ 32A 5P	1 MCB 16A 3P
	4 SCHUKO 16A 230V	1 MCB 32A 3P
		2 MCB 16A 3P

Order Code
ZJ12PCZX-4



Power Input	Output circuit	Switch protection
1 ZJ 32A 3P	4 ZJ 16A 3P	1RCD 40A 4P 0.03A
3M 3x4mm^2 Cable	4 SCHUKO 16A 230V	8 MCB 16A 3P

Order Code
ZJ24PCZX-1



Power Input	Output circuit	Switch protection
1 ZJ 63A 5P	1 ZJ 63A 5P	1 RCD 63A 4P 0.03A
3M 5x10mm^{2}Cable	1 ZJ 32A 5P	1 MCB 63A 3P
	2 ZJ 16A 5P	1 MCB 32A 3P
	4 SCHUKO 16A230V	2 MCB 16A 3P
		4 MCB 16A 1P

Order Code
ZJ24PCZX-2



Power Input	Output circuit	Switch protection
1 ZJ 63A 5P	2 ZJ 63A 5P	1RCD63A4P0.03A
3M 5x10mm^{2}Cable	2 ZJ 32A 3P	2 MCB 32A 3P
	2 ZJ 16A 5P	2 MCB 32A 1P
	2 ZJ 16A 3P	2 MCB 16A 3P
		2 MCB 16A 1P

Order Code
ZJ24PCZX-3

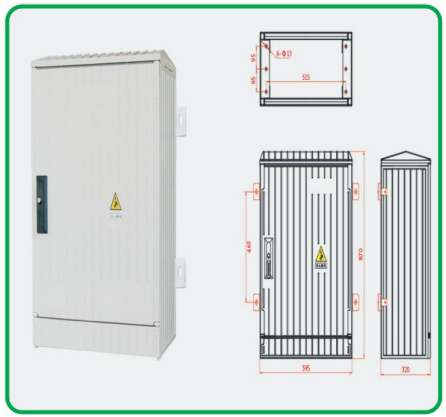


Power Input	Output circuit	Switch protection
1 ZJ 63A 5P	1 ZJ 63A 5P	1RCD63A4P0.03A
Concealed plug	1 ZJ 32A 5P	1 MCB 63A 3P
	2 ZJ 16A 5P	1 MCB 32A 3P
	2 ZJ 16A 3P	2 MCB 16A 3P
	4 SCHUKO 16A 230V	6 MCB 16A 1P

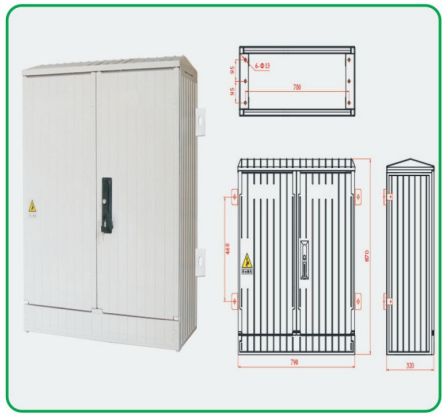
Order Code
ZJ24PCZX-4



Power Input	Output circuit	Switch protection
1 ZJ 63A 5P	2 ZJ 63A 5P	1RCD63A4P0.03A
Concealed plug	2 ZJ 16A 5P	2 MCB 63A 3P
	4 ZJ 16A 3P	2 MCB 16A 3P
		4 MCB 16A 1P



	SMC
	600×870×320mm
	600×870×480mm
	600×870×640mm



	SMC
	800×870×320mm
	800×870×480mm
	800×870×640mm



	SMC
	1000×870×320mm
	1000×870×480mm
	1000×870×640mm



	SMC
	1200×870×320mm
	1200×870×480mm
	1200×870×640mm



	SMC
	600×1150×320mm
	600×1150×480mm
	600×1150×640mm



	SMC
	800×1150×320mm
	800×1150×480mm
	800×1150×640mm



	SMC
	1000×1150×320mm
	1000×1150×480mm
	1000×1150×640mm



	SMC
	1200×1150×320mm
	1200×1150×480mm
	1200×1150×640mm



	SMC
	600 × 865 × 350mm



	400 × 640 × 240mm



	SMC
	600 × 1000 × 350mm



	800 × 1000 × 350mm



	SMC
	1000 × 1000 × 350mm



	SMC
	600 × 1250 × 350mm



	SMC
	800 × 1250 × 350mm



	SMC
	800 × 1250 × 485mm



	SMC
	800 × 1065 × 640mm



	SMC
	600 × 1250 × 350mm



	800 × 865 × 350mm







BJ-B
335×175×100mm



BJ-A
395×188×105mm



BJ-B
565×265×125mm



BJ
438×210×112mm



BJ
380×370×110mm



BJ
420×410×110mm



BJ
660×377×110mm



Bj
660×516×110mm



BJ
660×672×110mm



500×370×220mm



570×392×300mm



745×415×242mm



BJ
560×260×160mm



BJ
610×305×145mm



BJ
680×490×150mm



BJ
830×950×120mm



BJ
830×1100×120mm




BJ
1075×1225×120mm



BJ
1075×1470×120mm



BJ
535×580×120mm



BJ
780×680×120mm



BJ
420×220×110mm



BJ
740×525×145mm



BJ
810×715×170mm



BJ
1070×840×170mm




BJ
1070×1000×170mm




BJ
1070×1330×170mm




BJ
570×305×160mm



BJ
650×580×170mm



BJ
600×565×145mm




BJ
770×640×145mm




BJ
1030×640×145mm



BJ
1030×800×145mm



BJ
1030×1000×145mm




BJ
1030×560×145mm



BJ
1030×800×145mm



BJ
1030×1080×145mm



BJ
1030×1520×145mm




BJ
770×1160×145mm



BJ
532×638×132mm



BJ
800×678×145mm



BJ
800×830×145mm



BJ
800×678×145mm



CT
800×600×165mm



800×820×240mm



770×690×245mm



700×630×235mm



700×520×235mm



	SMC
	PC+ABS
	800×748×180mm



	SMC
	PC+ABS
	800×890×180mm



	SMC
	PC+ABS
	1000×910×180mm



	SMC
	PC+ABS
	1000×1166×180mm



	SMC
	PC+ABS
	1000×680×180mm



	CT
	PC+ABS
	700×1000×180mm



	SMC
	PC+ABS
	450×270×120mm



	SMC
	PC+ABS
	620×350×145mm




	420×230×160mm



	BJ
	420×280×120mm



	BJ
	420×380×160mm



	BJ
	535×465×160mm



	BJ
	600×600×160mm



	BJ
	760×520×200mm



	500×300×170mm



	BJ
	770×600×200mm



	BJ
	790×1100×200mm



	BJ
	535×735×160mm



BJ
130×130×86mm



BJ
260×180×120mm



BJ
360×360×120(160)mm



BJ
520×400×220（300）mm



BJ
150×85×95mm



BJ
139×110×100mm



BJ
100×82×68mm



BJ
155×82×68mm



BJ
260×82×68mm

